



The armatures



Modells

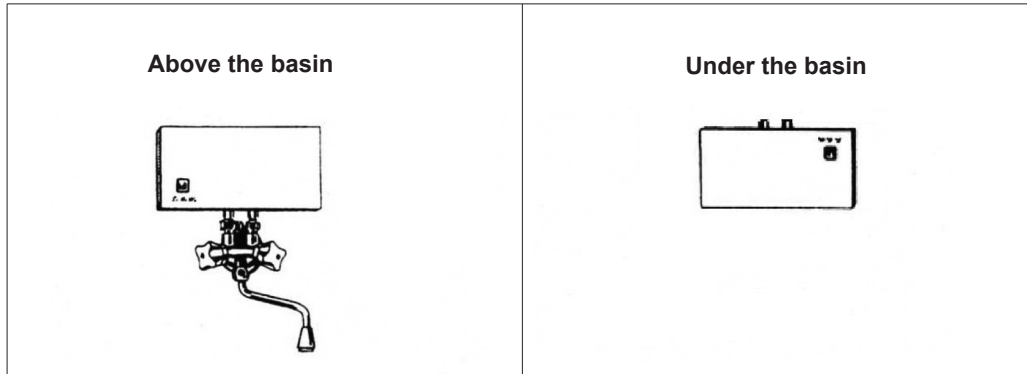

Armatures (low pressure) for on the basin

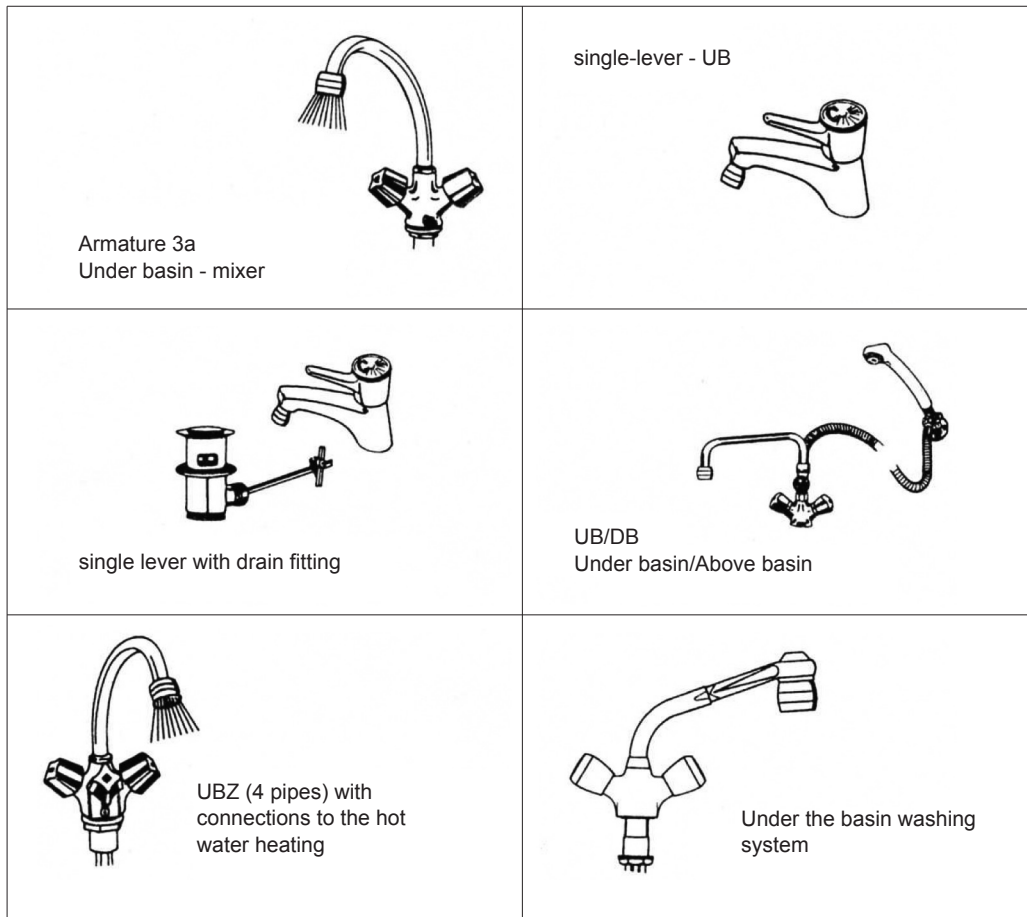

The technology everybody understands.

connection voltage	cable cross section	kW	ampere	incoming water temperature 14 °C litres per minute		
				30 °C	40 °C	50 °C
alternating current 230 V	1,5	2,5	11,3	2,2	1,4	1,0
	1,5	3	13,6	2,7	1,7	1,2
	1,5	3,5	16,0	3,2	1,9	1,4
	2,5	4	18,0	3,6	2,2	1,6
	2,5 - 4,0	6	27,0	5,3	3,3	2,4
2-phase current 400 V	1,5	6	1,6	5,3	3,3	2,4
	2,5 - 4,0	7,5	20,0	6,7	4,1	3,0

All specified indications are approximate

SOHEWA is a fully automatic, resistance-heated hot water automat. Minimum pressure 1.5 atm/bar. It is an open, pressureless device (low-pressure). The water outlet must not be sealed! The device can be installed above or under the basin without any assembly troubles. You only have to change the cold water tap. Up to 3.5 kW connection load the wire has to be secured with a 10 amperes fuse slow or 10 amperes push-button automat or with a regular 16 amperes fuse. From a 4 kW connection value the device has to be operated with a permanent electrical wiring. There must not be used an earthing-pin plug! An independent power circuit is necessary. The construction can be installed in a horizontal position and makes it therefore possible to mount a reliable hot water automat in a compact, unobstrusive and space saving design. Device dimension: 10 x 20 cm, 6 cm depth. In case of the upper basin solution: from the middle of the water connection to the upper edge of the device 16.5 cm.